


PRODUCT  
DETAILS  
ONLINE



# KIWOMASK® S 7318/1 VP

Sprayable and removable, one-component protective lacquer, transparent

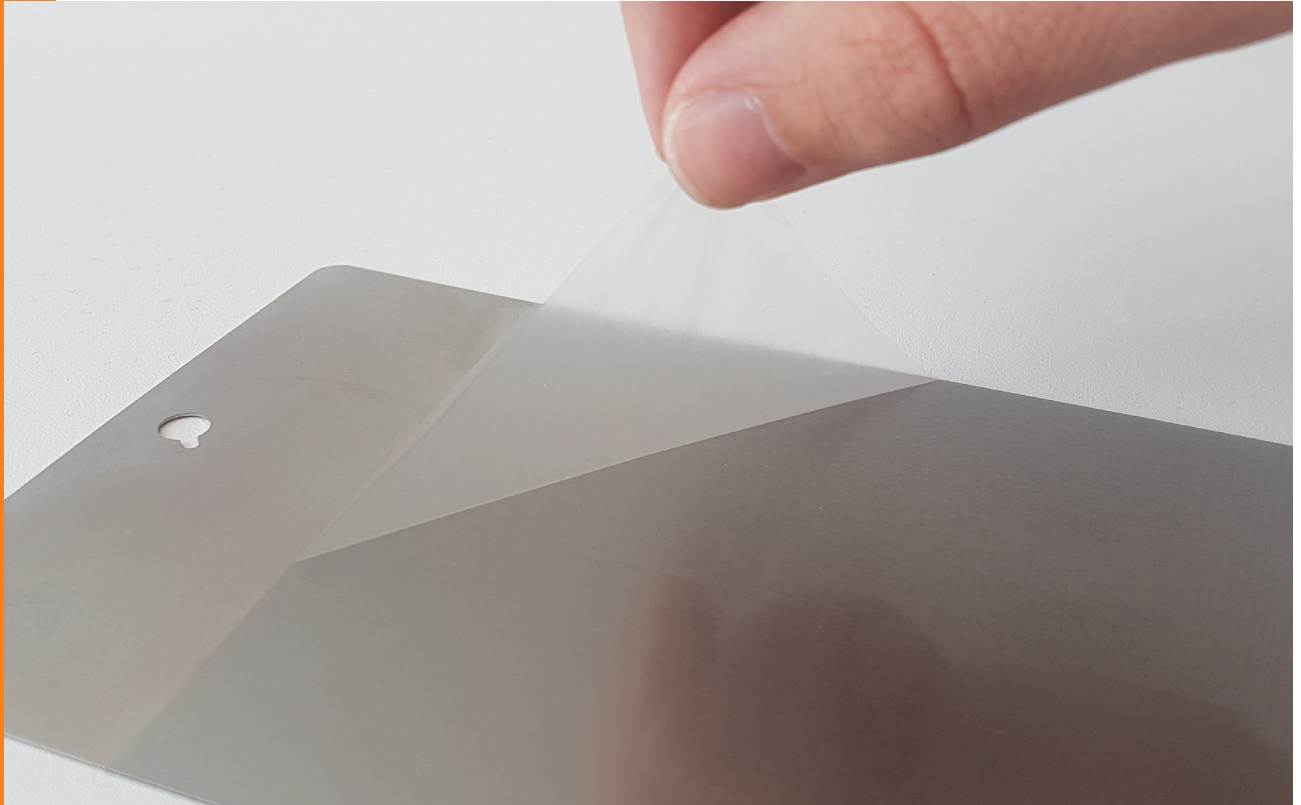

## Product benefits

- very high transparency
- solvent-free
- good flowing and wetting properties
- removable without residue

## KIWOMASK® S 7318/1 VP

Protective lacquer, based on aqueous polymers, for the protection of component parts against mechanical damage and spray mist, e.g. in a spray booth

KIWOMASK S 7318/1 VP is very transparent, has good flowing and wetting properties. Make trials to test adhesion and removal of the dried film from different substrates. Do not store protected component parts in very humid climate. When dried, KIWOMASK S 7318/1 VP can be peeled off, or removed with water. Not suitable for rusting metals.

### Application:

Stir well prior to use. For an easy removal of the protective film, ensure a thick layer is applied onto the different surfaces. Preferably, apply KIWOMASK S 7318/1 VP by spraying. When coated by roller or dipping, the product can be reduced by 5-10% with water.

### Properties:

- Colour: colourless, transparent when dry
- Viscosity: ca. 250 mPas\*
- Reducing: water
- Cleaning: water

\* Rheomat RM 180, MS 11, D=100 s<sup>-1</sup>, 23 °C

Ask for a sample to be convinced by hands-on-tests!



## Resists & Coatings by KIWO®

for industrial and creative applications on many materials

- "liquid" protective film
- etching and galvano resists
- photo-resists
- sand-blasting, sputter and brushing resists
- inkjet resists

KIWO  
ONLINE

